


TECHNICAL DATA SHEET

FINGER-JOINTED PANELS

WOOD SPIECES:

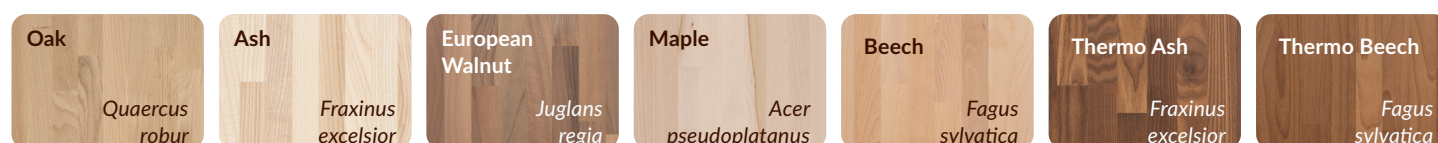

ASSORTMENT DESCRIPTION:

CATEGORY	finger-jointed wood panels
APPLICATION	furniture, construction, stairs, kitchens table tops, worktops, shelves, doors, decorative articles
DIMENSIONS	thickness: 15–100 mm (above 45 mm optionally layered gluing) width: up to 1300 mm length: up to 6100 mm
QUALITY	AB, AC, BC, CC
LONGITUDINAL JOINTING	D4 glue
EDGE GLUING	standard glue D3 – D4 optional
MOISTURE CONTENT	KD 9% +/- 2% according to the standard EN 15497:2014 (finger jointed solid timber)
LAMELLA WIDTHS	38–45 mm (standard) / 15–90 mm (optional)
SANDING	grit 120 (optionally 150)
PROCESSING OPTIONS	cut to size, edge profiling, drilling, machining on CNC, oiling, lacquering
CERTIFICATIONS	FSC, PEFC, EPD
FORMALDEHYDE	in compliance with E1 PN-EN 717-1:2006
BENDING STRENGTH	40 N/mm ² EN 408:2010+A1:2012
BONDING QUALITY	results available on demand / EN13354:2008
REACH	compliant



Edwood Sp. z o.o.
86 Łomaska Street, 21-500 Biała Podlaska, Poland
edwood@edwood.pl | +48 83 342 40 11
www.edwood.pl

